ÇELTİK RANDIMAN MAKİNASI

Paddy Quality Test Machine

Лабораторная установка для риса сырца

آلة اختبار جودة الأرز

Machine D'essai De Qualité De Paddy

Laboratorio


Máquina de Controlo de Qualidade do Arroz





MAKİNANIN TEKNİK RESMİ

MACHINE TECHNICAL DRAWING

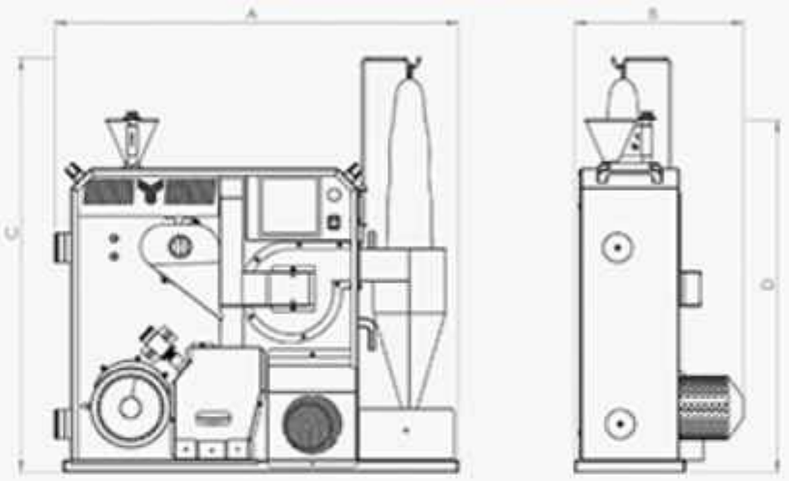

Ürün Kodu Product Code	Teknik Özellikler Technical Specifications		Makina Ölçüleri Machine Dimensions				Kasa Ölçüleri Box Size cm L+W+H	Ağırlık Weight Kg	Brüt Kilo Gross Weight Kg
	Kapasite / Capacity Gr/Hour	Motor / Motor	A mm	B mm	C mm	D mm			
CRM 125 2T	100	0,75 KW (220 V)	950	385	1000	850	40x105x105	87	108

TR

KULLANIM AMACI

Çeltik ürününün verimliliğinin belirlenmesinde hızlı, doğru sonuçlar sağlayacak şekilde tasarlanmıştır.

KULLANIM ALANI

Bu makine, pirinç işleme tesislerinde, gıda analiz laboratuvarlarda, ürün araştırma - geliştirme enstitülerinde ve eğitim kurumlarında gereksinimlerini karşılamak için üretilmiştir.

ÖZELLİKLERİ VE AVANTAJLARI

- Kompakt tasarım
  (Tek ünitede tüm işlemlerin yapılabilme özelliği)
- Çıkan pirinç, kırık, toz, kepek ayrı ayrı görülebilmektedir.
- Minimum bakım
- Yüksek verim
- Sessiz ve sorunsuz çalışma,
- Özdeş yapı yüksekliği

TEKNİK ÖZELLİKLERİ

- Makine 100 gram çeltik ile randıman işlemini gerçekleştirmelidir.
- Çeltiğin makinaya iletimi titreşimli oluk vasıtasıyla istikrarlı bir iletim sağlanmaktadır.
- Soyma sistemi poliüretan merdaneler vasıtasıyla yapılmaktadır.
- Makinede soyucu ve parlatıcı için farklı programlanabilir bir zaman rölesi ve kırık ayırma işlemi için farklı programlanabilir toplam 2 adet zaman rölesi bulunmalıdır.
- Makinede pirinci beyazlatıcı ve parlatıcı taş sistemlidir.
- Pirincin beyazlık derecesinin ayarlanmasına olanak verecek fren sistemi bulunmaktadır.
- Makinede ince kepek, kalın kepek ve pirinç ürünlerinin ayrı ayrı toplandığı hazneler vardır.
- Soyulma işlemi gerçekleşen çeltiğin kabuğunu ve parlatılan pirinç içinden kepeğini ayıran emici aspiratör sistemi bulunmaktadır,
- Parlatma işlemi için ayarlı poliüretan fren sistemi bulunmaktadır.
- Emici fan sistemin emiş gücü ayarlanabilmektedir.
- Makine üzerinde dâhili olarak çalışan kırık ayırma tamburu bulunmaktadır.
- Filtreli siklon sistemiyle tozsuz bir çalışma ortamı sunmaktadır.
- Tek fazlı 220 volt 0,75 KW motor ile çalışmaktadır.

EN

INTENDED USE

The paddy testing machines are designed to provide fast and accurate results of the efficiency of the paddy product.

APPLICATION FIELDS

This machine is manufactured to meet the requirements of rice processing plants, food analysis laboratories, product research & development institutes and educational institutes.

FEATURES & ADVANTAGES

- Compact design (entire process is in a single unit)
- Output rice, broken, dust, dandruff can be seen separately.
- Minimum maintenance
- High efficiency
- Quiet and smooth operation,
- Identical structure height

TECHNICAL SPECIFICATIONS

- The machine can perform the efficiency test with 100 grams of paddy.
- The steady transmission of the paddy to the machine is provided by a vibrating groove.
- The peeling system is made by polyurethane rollers.
- There are 2 different programmable time relays on the machine. One is for the peeler and polisher, and the other is for the broken separating process.
- There is a stone whitening and polishing system in the machine.
- There is a brake system to allow adjustment of the degree of whiteness of the paddy.
- The machine has separate collection containers for fine bran, thick bran and paddy products.
- There is an absorbent aspirator system that separates the polished rice and paddy husk from the bran inside it.
- There is an adjustable polyurethane brake system for polishing.
- The suction power of the sucking fan system can be adjusted.
- There is an internal broken separation drum in the machine.
- The filter cyclone system offers a dust-free working environment
- It works with a single-phase 220 V 0.75 kW motor.