


## DIKEY BEYAZLATICI

- Vertical Whitener
- Вертикальный шлифовальник
- الآلة البيضاء
- Blanchisseur Vertical
- Pulidora Vertical
- Branquador Vertical



## MAKİNANIN TEKNİK RESMİ MACHINE TECHNICAL DRAWING

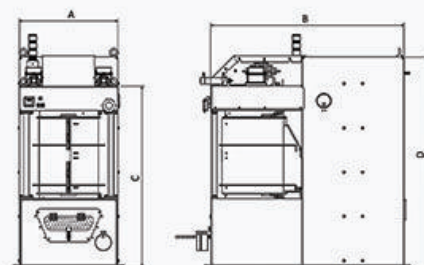

| Ürün Kodu<br>Product Code | Teknik Özellikler<br>Technical Specifications |               | Makina Ölçüleri<br>Machine Dimensions |         |         |         | Kasa Ölçüleri<br>Box Size<br>cm LxWxH | Ağırlık<br>Weight<br>Kg | Brüt Kilo<br>Gross Weight<br>Kg |
|---------------------------|-----------------------------------------------|---------------|---------------------------------------|---------|---------|---------|---------------------------------------|-------------------------|---------------------------------|
|                           | Kapasite / Capacity<br>Ton/Hour               | Motor / Motor | A<br>mm                               | B<br>mm | C<br>mm | D<br>mm |                                       |                         |                                 |
| PDB - 7                   | 6 - 8                                         | 55 KW         | 800                                   | 1575    | 1700    | 1975    | 190x100x200                           | 1555                    | 1615                            |
| PDB - 10                  | 10 - 12                                       | 75 KW         | 1000                                  | 1715    | 1973    | 2103    | 187x112x225                           | 1980                    | 2040                            |

TR

### KULLANIM AMACI

Dikey Beyazlatıcı makine çeltik işleme tesislerinde, kargo pirinç dış yüzündeki kepeği, makine içindeki dikey dizilimli taş sistemi vasıtasıyla zımparalayarak alan ve kargo pirinç beyazlatmak için kullanılmaktadır.

### KULLANIM ALANI

Dikey Beyazlatıcı makineler özellikle çeltik işleme tesislerinde kullanılmak üzere tasarlanmış olmasına rağmen, sarı bezelye, kuyumi, siyah ve yeşil bürüç vb. bakliyat ürünlerinin kabuk soyma işleminde de kullanılabilir.

### ÖZELLİKLERİ VE AVANTAJLARI

- Yüksek işlem kapasitesi ve yüksek performans
- Minimum kırık oranı ile mükemmel beyazlık
- Minimum kepek kalıntısı
- Minimum periyodik bakım ihtiyacı
- Minimum sarf malzeme ihtiyacı
- Kompakt tasarım
- İstikrarlı çalışma
- Uzun ömürlü sarf malzemeler
- Maksimum güvenlik
- Küçük kurulum alanı
- Kolay kullanım ve ayar

### TEKNİK ÖZELLİKLERİ

- ✓ Makine kapalı konfigürasyona sahip olup maksimum güvenlidir.
- ✓ Makinada 6 adet silisyum karbür beyazlatma zımpara taşı bulunmaktadır.
- ✓ Mahsul giriş çıkış kontrol sistemleri mevcut olacaktır.
- ✓ Ürün akışını ayarlamak için otomatik klape sistemi bulunmaktadır.
- ✓ Pirinçten alınan anılan kepeğin makine dışına atılması için vakum ayar vanası bulunmaktadır.
- ✓ Makinenin aşırı yüklenmesi durumunda motorun amperinin hareketlenmesi esas alınarak ürün giriş haznesinin kapatılması sağlayan pnömomatik piston sistemi ve ampermetre sistemi mevcuttur.
- ✓ Makine üzerinde bulunan elektrikli özel ısı işleminden geçirilme ve uzun ömürlü olması sağlanmaktadır.
- ✓ Beyazlatma zımpara taşı ile elek sistemi tek kişi tarafından kolay bir şekilde değiştirilmesine imkan veren bir konstrüksiyon sistemine sahiptir.
- ✓ Ürün beyazlatma ayar derecesi fren sistemi ve ürün çıkışındaki balans ağırlığı ile istenilen derecede yapılabilmektedir.
- ✓ Beyazlatma işleminde yüksek verim alabilmek için makinenin içindeki pirinçin düzgün akışı ve etkin aspirasyonu sağlanmıştır. Bu sayede, pirinç çok nazikçe beyazlatılmaktadır.
- ✓ Makinada start ve acil stop butonu bulunmaktadır.
- ✓ PDB-7 : Kapasite : 6-8 Ton / Saat.
- ✓ Motor : 1 Adet 55 KW 1500 d/d Motor.
- ✓ PDB-10 : Kapasite : 10-12 Ton / Saat.
- ✓ Motor : 1 Adet 75 KW 1500 d/d Motor.

EN

### INTENDED USE

The vertical whitening machines are used in rice processing facilities to whiten the cargo rice by grinding it with the vertically aligned stone system inside the machine after separating it from its outer bran.

### APPLICATION FIELDS

Even though the vertical whitening machines are specially designed to be used in paddy processing facilities, it can be used in the peeling process of yellow peas, birdseed, black and green beans. Etc.

### FEATURES & ADVANTAGES

- High processing capacity and high performance
- Excellent whiteness with minimal fracture rate
- Minimum bran residue
- Minimum maintenance requirements
- Minimum needed supplies
- Compact design
- Stable operation
- Long-lasting consumables
- Maximum security
- Small installation area
- Easy to use and setting

### TECHNICAL SPECIFICATIONS

- ✓ The machine has a closed construction with maximum security.
- ✓ There are 6 silicon carbide abrasive whitening stones in the machine.
- ✓ Crop input and output control systems are available.
- ✓ There is an automatic valve system to adjust the product flow.
- ✓ There is a vacuum regulating valve to extract the bran separated from rice out of the machine.
- ✓ There is a pneumatic piston system and ammeter system available that allow the closure of the product input hopper when the machine is overloaded according to the engine's mobilization amp.
- ✓ The sleeves on the machine are passed through a special heat treatment that ensures a longer life.
- ✓ It has a construction system that allows easy replacement of the whitening grinding stones and sieve system by only one person.
- ✓ The product's whitening setting can be set to desirable levels with the break system and balance weight of product output.
- ✓ To ensure high efficiency in the whitening process the smooth flow and effective aspiration of the rice is provided. Thus, the rice is gently whitened.
- ✓ There are start and emergency stop buttons on the machine
- ✓ PDB-7 : Capacity : 6-8 Ton / Hour.
- ✓ Engine : 1 Unit 55 KW 1500 rpm Motor.
- ✓ PDB-10 : Capacity : 10-12 Ton / Hour.
- ✓ Engine : 1 Unit 75 KW 1500 rpm Motor.