

Yaşar

TAŞ AYIRICI



- Destoner
- Камнеотборочная машина
- دة الحجر
- Dépierrure Frac
- Despedradora
- Removedora de Pedras

TR

KULLANIM AMACI

Taş ayırıcı makineler; kuru ve taneli tarım ürünlerinin içindeki taş, kum, cam, toprak ve yüksek yoğunluklu maddelerin temizlenmesi amacıyla kullanılmaktadır.

KULLANIM ALANI

Taş ayırıcı makineler; çeltik, piring, buğday, mercimek, fındık, fıstık, kuru taneli tarım ve baklagilleri işleyen tesislerde kullanılabilmektedir.

ÖZELLİKLERİ VE AVANTAJLARI

- Yüksek Kalite
- Yüksek Performans
- Yüksek Kapasite
- Uzun Ömür
- Düşük enerji tüketimi
- Yüksek kapasite ve verim
- Minimum Periyodik Bakım İhtiyacı
- Uzun ömürlü ve kolay değiştirilebilir elek sistemi
- Hava akışı hassas ayarlama imkanı
- Kolay temizleme
- Tozsuz çalışma imkanı
- Minimum Ses Seviyesi
- Maksimum Kullanımı Kolaylığı
- Maksimum Güvenlik
- Yüksek Hassasiyet


TEKNİK ÖZELLİKLERİ

- ✓ Makine sabit şasi, hareketli ana gövde, besleme ve aspirasyon bölümleri olmak üzere üç ana yapıdan oluşmaktadır.
- ✓ Makine hava akışı hassas ayarlama imkânına sahiptir.
- ✓ Eleğin eğim açısı istenildiği gibi ayarlanabilmektedir.
- ✓ Eğim açısı ve hava akış ayarlaması sayesinde ürünün cinsine, iltihva ettiği taş miktarına göre, ayırma derecesini ayarlamak mümkündür.
- ✓ Makine aspirasyonu için gerekli olan üzerine yatay olarak monte edilmiş 11 KW fan bulunmaktadır.
- ✓ Makine tasarımı şekli ile düşük toz ve düşük sesli bir makinedir.
- ✓ Hava basıncı özel bir göstergesi ile gözlemlenebilmektedir.
- ✓ Makinada bütün elek yüzeyinde hava dağılımının eşit olması, vibratörle sağlanan titreşimin çok muntazam bir ürün dağılımına imkân vermesi, ayırma hassasiyetini en yüksek seviyeye çıkarmıştır.
- ✓ Makine üzerinde bulunan vibro motorlar sayesinde düşük enerji tüketimlidir.
- ✓ CPTA-5 : Kapasite: 5000 Kg / Saat
- ✓ Vibro Motor: 2 Adet 0.35 KW Vibro Motor
- ✓ Motor: 11 KW 1500 d/d
- ✓ CPTA-10 : Kapasite: 10000 Kg / Saat
- ✓ Vibro Motor: 2 Adet 0.35 KW Vibro Motor
- ✓ Motor: 11 KW 1500 d/d

Yaşar

MAKİNANIN TEKNİK RESMİ

MACHINE TECHNICAL DRAWING

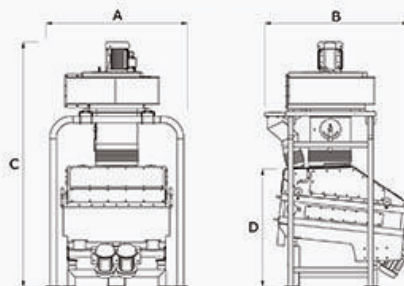

Ürün Kodu Product Code	Teknik Özellikler Technical Specifications		Makine Ölçüleri Machine Dimensions				Kasa Ölçüleri Box Size cm LxWxH	Ağırlık Weight Kg	Brüt Kilo Gross Weight Kg
	Kapasite / Capacity Tons / Hour	Motor / Motor	A mm	B mm	C mm	D mm			
CPTA - 5	5	11,70 KW	1370	1760	2990	1445	180x180x220 120x125x140	665 320	760 360
CPTA - 10	10	11,70 KW	1920	1700	2990	2025	180x212x202 120x125x140	1400 320	1495 360

EN

INTENDED USE

The de-stoner machines are used to clean dry and granular agricultural products from stone, sand, glass, soil and other high-density materials.

APPLICATION FIELDS

The de-stoner machines can be used in dried grained agricultural and legumes processing facilities such as rice, wheat, rice, lentils, nuts, peanuts, etc.

FEATURES & ADVANTAGES

- High quality
- High performance
- High-Capacity
- Long life
- Low energy consumption
- High capacity and efficiency
- Minimum Periodic Maintenance Needs
- Long-lasting and easy to replace sieve system
- Airflow the possibility of fine tuning
- Easy cleaning
- Dust-free working opportunities
- Minimum Volume
- Maximum Ease of Use
- Maximum Security
- High Sensitivity

TECHNICAL SPECIFICATIONS

- ✓ The machine is separated into three part: fixed chassis, moving main body and feed and aspiration part.
- ✓ The machine airflow has the possibility of fine tuning.
- ✓ Inclination angle of the sieve can be applied as desired.
- ✓ It is possible to adjust the degree of separation according to the type of the product and the amount of stone it contains using the inclination angle and air flow adjustment feature.
- ✓ Machine has 11 KW fan mounted horizontally on for aspiration
- ✓ The machine is designed to produce low dust and low noise
- ✓ Air pressure is observed using a special indicator.
- ✓ The distribution of air on the surface of the sieves in equal proportions, enabling the vibrator's vibrations to distribute the product in a uniform way has made the separation sensitivity of the highest level.
- ✓ The machine uses low energy because of the vibro engines on it.
- ✓ CPTA-5 : Capacity: 5000 Kg / Hour
- ✓ Vibro Engine: 2 units 0.35 KW Vibro Engine
- ✓ Engine: 11 KW 1500 rpm
- ✓ CPTA-10 : Capacity: 10000 Kg / Hour
- ✓ Vibro Engine: 2 units 0.35 KW Vibro Engine
- ✓ Engine: 11 KW 1500 rpm