Yaşar

TAŞ AYIRICI

- Destoner
- Камнеотборочная машина
- آلة فرز الحجر
- Dépierreur Frac
- Despedradora
- Removedora de Pedras



TR

KULLANIM AMACI

Taş ayırıcı makineler; kuru ve taneli tarım ürünlerinin içindeki taş, kum, cam, toprak ve yüksek yoğunluklu maddelerin temizlenmesi amacıyla kullanılmaktadır.

KULLANIM ALANI

Taş ayırıcı makineler; çeltik, pirinç, buğday, mercimek, fındık, fıstık, kuru taneli tarım ve baklagilleri işleyen tesislerde kullanılabilmektedir.

ÖZELLİKLERİ VE AVANTAJLARI

- Yüksek Kalite
- Yüksek Performans
- Yüksek Kapasite
- Uzun Ömür
- Düşük enerji tüketimi
- Yüksek kapasite ve verim
- Minimum Periyodik Bakım İhtiyacı
- Uzun ömürlü ve kolay değiştirilebilir elek sistemi
- Hava akışını hassas ayarlama imkânı
- Kolay temizleme
- Tozsuz çalışma imkânı
- Minimum Ses Seviyesi
- Maksimum Kullanma Kolaylığı
- Maksimum Güvenlik
- Yüksek Hassasiyet


TEKNİK ÖZELLİKLERİ

- Makine sabit şasi, hareketli ana gövde, besleme ve aspirasyon bölümü olmak üzere üç ana yapıdan oluşmaktadır.
- Makine hava akışını hassas ayarlama imkânına sahiptir.
- Eleğin eğim açısı istenildiği gibi ayarlanabilmektedir.
- Eğim açısı ve hava akış ayarlaması sayesinde ürünün cinsine, ihtiva ettiği taş miktarına göre, ayırma derecesini ayarlamak mümkündür.
- Makine aspirasyonu için gerekli olan üzerine yatay olarak montelenmiş 11 KW fan bulunmaktadır.
- Makine tasarım şekli ile düşük toz ve düşük sesli bir makinedir.
- Hava basıncı özel bir gösterge ile gözlemlenebilmektedir.
- Makinada bütün elek yüzeyinde hava dağılımının eşit olması, vibratörle sağlanan titreşimin çok muntazam bir ürün dağılımına imkân vermesi, ayırım hassasiyetini en yüksek seviyeye çıkarmıştır.
- Makine üzerinde bulunan vibro motorlar sayesinde düşük enerji tüketimlidir.
- **CPTA-5 :** Kapasite: 5000 Kg / Saat
- Vibro Motor: 2 Adet 0.35 KW Vibro Motor
- Motor: 11 KW 1500 d/d
- **CPTA-10 :** Kapasite: 10000 Kg / Saat
- Vibro Motor: 2 Adet 0.35 KW Vibro Motor
- Motor: 11 KW 1500 d/d

Yaşar

MAKİNANIN TEKNİK RESMİ

MACHINE TECHNICAL DRAWING

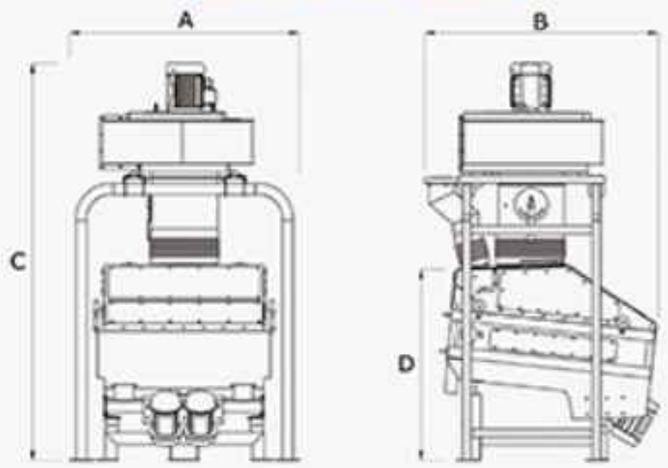

Ürün Kodu Product Code	Teknik Özellikler Technical Specifications		Makina Ölçüleri Machine Dimensions				Kasa Ölçüleri Box Size cm L×W×H	Ağırlık Weight Kg	Brüt Kilo Gross Weight Kg
	Kapasite / Capacity Ton / Hour	Motor / Motor	A mm	B mm	C mm	D mm			
CPTA - 5	5	11,70 KW	1370	1760	2990	1445	180×180×220	665	760
							120×125×140	320	360
CPTA - 10	10	11,70 KW	1920	1700	2990	2025	180×212×202	820	858
							120×125×140	320	360

EN

INTENDED USE

The de-stoner machines are used to clean dry and granular agricultural products from stone, sand, glass, soil and other high-density materials.

APPLICATION FIELDS

The de-stoner machines can be used in dried grained agricultural and legumes processing facilities such as rice, wheat, rice, lentils, nuts, peanuts, etc.

FEATURES & ADVANTAGES

- High quality
- High performance
- High-Capacity
- Long life
- Low energy consumption
- High capacity and efficiency
- Minimum Periodic Maintenance Needs
- Long-lasting and easy to replace sieve system
- Airflow the possibility of fine tuning
- Easy cleaning
- Dust-free working opportunities
- Minimum Volume
- Maximum Ease of Use
- Maximum Security
- High Sensitivity

TECHNICAL SPECIFICATIONS

- The machine is separated into three part; fixed chassis, moving main body and feed and aspiration part.
- The machine airflow has the possibility of fine tuning.
- Inclination angle of the sieve can be applied as desired.
- It is possible to adjust the degree of separation according to the type of the product and the amount of stone it contains using the inclination angle and air flow adjustment feature.
- Machine has 11 KW fan mounted horizontally on for aspiration
- The machine is designed to produce low dust and low noise
- Air pressure is observed using a special indicator.
- The distribution of air on the surface of the sieves in equal proportions, enabling the vibrator's vibrations to distribute the product in a uniform way has made the separation sensitivity of the highest level.
- The machine uses low energy because of the vibro engines on it.
- **CPTA-5 :** Capacity: 5000 Kg / Hour
- Vibro Engine: 2 units 0.35 KW Vibro Engine
- Engine: 11 KW 1500 rpm
- **CPTA-10 :** Capacity: 10000 Kg / Hour
- Vibro Engine: 2 units 0.35 KW Vibro Engine
- Engine: 11 KW 1500 rpm