Yaşar

HAMTANE TRİYÖRÜ

Thickness Grader

Триер не зрелого зерна

فارز الحبة الغير الناضج

Trieur De Grain Crayeux

Triyor de Grano Inmaduro


Classificador de Espessura



Yaşar

MAKİNANIN TEKNİK RESMİ

MACHINE TECHNICAL DRAWING

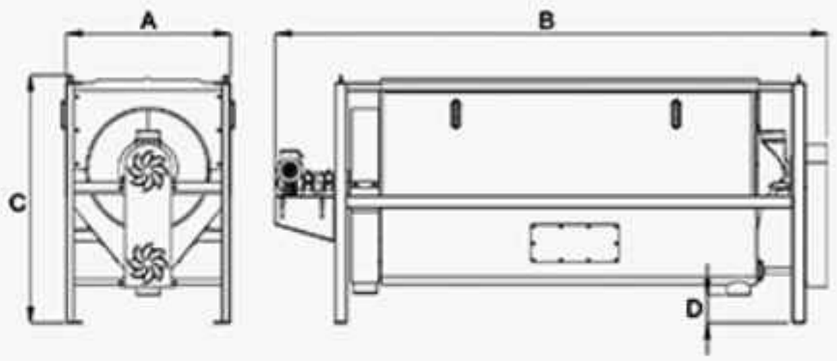

Ürün Kodu Product Code	Teknik Özellikler Technical Specifications		Makina Ölçüleri Machine Dimensions				Kasa Ölçüleri Box Size cm L×W×H	Ağırlık Weight Kg	Brüt Kilo Gross Weight Kg
	Kapasite / Capacity Ton / Hour	Motor / Motor	A mm	B mm	C mm	D mm			
PHT - 5	4 – 5	1,1 KW	830	2785	1215	150	290x95x125	448	498

TR

KULLANIM AMACI

Hamtane triyörü makinesi, olgunlaşmamış yani oluşumunu tam olarak gerçekleştirememiş pirinç ile olgunlaşan pirinci bünyesine alıp eleyerek birbirinden ayıran bir makinedir.

KULLANIM ALANI

Hamtane triyörü makinaları çeltik işleme tesislerinde hamtane, sütlü tane ve pirincin içindeki tozun ayıştırılması içinde kullanılabilmektedir. Ayrıca bu boyutlardaki çeşitli tahılları, yağlı tohumları, bakliyat (baklagilleri), kahve çekirdeklerini eleme işleminde de kullanılabilmektedir.

ÖZELLİKLERİ VE AVANTAJLARI

- Maksimum eleme verimliliği
- Yüksek performans
- Kompakt tasarım
- Düşük bakım ihtiyacı
- Düşük güç tüketimi
- Sessiz çalışma özelliği
- Maksimum güvenlik
- Uzun Ömür
- Maksimum Kullanma Kolaylığı
- Minimum Ses Seviyesi

TEKNİK ÖZELLİKLERİ

- Makine dikdörtgen ve kare profillerden çerçeve oluşturularak kaynakla birleştirilmiş sağlam bir yapıda imal edilmektedir.
- Makine tek katlı olarak imal edilmektedir.
- Makinede kullanılacak ürün cinsine uygun elek numarası kullanılmaktadır.
- Gerektiğinde kolay bir şekilde elek numarası değiştirilebilmektedir.
- Makinenin elek çukurlarının tıkanmasını önlemek amacıyla dâhili fırça sistemi bulunmaktadır.
- Makinenin kapasitesi 4-5 ton / Saattir.
- Makine üzerinde 1 Adet 1,1 KW redüktörlü motor mevcuttur.

EN

INTENDED USE

The raw grain trieur machine is a machine that separates not fully ripred rice, which means raw rice from fully ripe rice according to their body structure.

APPLICATION FIELDS

The machine is made according to desire to separate the dust in raw grain, milky grain and rice. In addition it can be used with grains in similar size like cereals, oil seeds, pulses (legumes), coffee beans.

FEATURES & ADVANTAGES

- The maximum screening efficiency
- High performance
- Compact design
- Low maintenance
- Low power consumption
- Quiet operation
- Maximum security
- Long life
- Maximum Ease of Use
- Minimum Volume

TECHNICAL SPECIFICATIONS

- The machine is manufactured out of rectangular and square frames and welded together in a sturdy structure.
- The machine is manufactured with one floor.
- An appropriate sieve number is used according to the product.
- If necessary, the sieve number can easily be changed
- There is an internal brush system to prevent the clogging of the sieve holes.
- Capacity: 4-5 Ton / Hour.
- Engine: 1 Unit 1,1 KW Geared motor.